



TRANSFORMER COMPONENTS??  
ASK ASCO!!


[www.ascocomponents.co.uk](http://www.ascocomponents.co.uk)

[sales@ascocomponents.co.uk](mailto:sales@ascocomponents.co.uk)

**EI 84 K FLANGE (INBUILT TERMINAL MOUNTS)**

**Lam 70x84**

| TYPE     | REF.    | a    | b    | c    | d    | e    | f    | g | h | x2 | x3 | S   | L    | No of terminals |
|----------|---------|------|------|------|------|------|------|---|---|----|----|-----|------|-----------------|
| EI 84/29 | 2829K/1 | 28,7 | 29,5 | 41,0 | 55,1 | 60,0 | 38,0 |   |   |    |    | 1,5 | 64,5 | 2X7             |
| EI 84/38 | 2838K/1 | 28,7 | 38,8 | 41,0 | 55,1 | 69,3 | 38,0 |   |   |    |    | 1,5 | 64,5 | 2X7             |
| EI 84/41 | 2841K/1 | 28,7 | 41,5 | 41,0 | 55,1 | 74,0 | 38,0 |   |   |    |    | 1,5 | 64,5 | 2X7             |
| EI 84/43 | 2843K/1 | 28,7 | 43,5 | 41,0 | 55,1 | 76,0 | 38,0 |   |   |    |    | 1,5 | 64,5 | 2X7             |
| EI 84/51 | 2850K/1 | 28,7 | 50,0 | 41,0 | 55,1 | 82,5 | 38,0 |   |   |    |    | 1,5 | 64,5 | 2X7             |

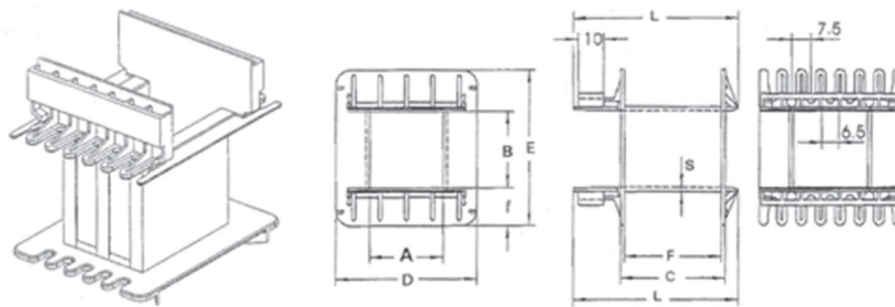

TEMPERATURE AND FLAMABILTY RATINGS OF STANDARD MATERIALS

| Material Ref | Base Material                   | Temperature Class (2000h) | Conforming to standards         | UL94 |
|--------------|---------------------------------|---------------------------|---------------------------------|------|
| RP3          | Nylon6 +30% glass reinforced    | F (155°C)                 | IEC85<br>ASTM<br>ISO/VDE<br>DIN | HB   |
| RP5          | Nylon 6.6 +25% glass reinforced | B (130°C)                 |                                 | V0   |
| RP7          | Pet +30% glass reinforced       | H (180°C)                 |                                 | V0   |